

RATE-MASTER® POLYCARBONATE FLOWMETERS

2", 5" or 10" Scale, Interchangeable Bodies

CALIBRATION SERVICES AVAILABLE




Model RMC
10" scale, 15-3/8" high



Model RMB-SSV
5" scale, 8-3/4" high



Model RMA-TMV
2" scale, 4-13/16" high

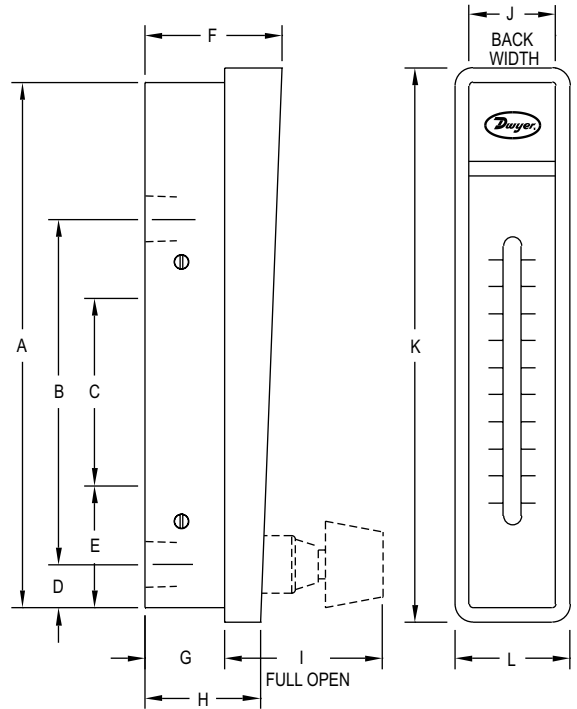

DIMENSIONS - FLOWMETER			
	Model RMA	Model RMB	Model RMC
A	4-9/16 [115.90]	8-1/2 [215.90]	15-1/8 [384.20]
B	3 [76.20] 1/8 NPT conn.	6-7/16 [163.50] 1/4 NPT conn.	12-1/4 [311.20] 1/2 NPT conn.
C	1-5/8 [41.28] 10-32 mtg. holes	3-15/16 [100.00] 1/4-20 mtg. holes	8-3/4 [222.30] 3/8-24 mtg. holes
D	3/8 [9.525]	5/8 [15.88]	1 [25.40]
E	1-1/16 [26.99]	1-7/8 [47.63]	2-3/4 [69.85]
F	1-3/16 [30.16]	1-3/4 [44.45]	2-1/2 [63.50]
G	11/16 [17.46]	1 [25.40]	1-7/16 [36.51]
H	61/64 [24.21]	1-7/16 [36.51]	1-31/32 [50.00]
I	1-3/8 [34.92]	1-13/16 [46.04]	2-1/2 [63.50]
J	3/4 [19.05]	1-1/4 [31.75]	2 [50.80]
K	4-13/16 [122.20]	8-3/4 [222.30]	15-3/8 [390.50]
L	1 [25.40]	1-1/2 [38.10]	2-1/4 [57.15]

The **Series RM Rate-Master® Polycarbonate Flowmeters** are a line of general use, direct reading precision flowmeters suitable for both gas and liquid applications. This Series consists of 2" (51 mm), 5" (127 mm) and 10" (254 mm) scales that can be panel or surface mounted with optional precision metering valves. Within a given Series, the Rate-Master® flowmeter bodies can be instantly interchanged, allowing the piping to remain undisturbed, interchangeability of the ranges, and easy cleaning.

BENEFITS/FEATURES

- Eliminate the need for troublesome conversions with direct reading scales
- Reduce installation damage and cost due to stainless steel backbone that absorbs piping torque
- Long operation life with durable, shatter-proof polycarbonate body
- High repeatability enabled by precision injection molding around a precision tapered pin
- Increased reading accuracy with special integral flow guides that stabilize float movement
- Save time with instantaneous flow reading from scale graduations on both sides of the indicating tube

APPLICATIONS

- Medical equipment
- Air samplers
- Gas analyzers
- Pollution monitors
- Chemical injectors
- Cabinet purging

SPECIFICATIONS

Service: Compatible gases and liquids.
Wetted Materials: Body: Polycarbonate; O-ring: Neoprene and Buna-N; Metal parts: SS; Float: SS, black glass, aluminum, K monel, tungsten carbide depending on range.
Temperature Limit: 130°F (54°C).
Pressure Limit: 100 psi (6.9 bar).
Accuracy: RMA: 4%; RMB: 3%; RMC: 2% of FS.
Process Connection: RMA: 1/8"; RMB: 1/4"; RMC: 1/2" female NPT.
Weight: RMA: 4 oz (113.4 g); RMB: 13 oz (368.5 g); RMC: 39 oz (1105.6 g).
Compliance: Meets the technical requirements of EU Directive 2011/65/EU (RoHS II).
CAUTION: Dwyer® Rate-Master® flowmeters are designed to provide satisfactory long term service when used with air, water, or other compatible media. Refer to factory for information on questionable gases or liquids. Caustic solutions, anti-freeze (ethylene glycol) and aromatic solvents should definitely not be used.

USA: California Proposition 65
WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Flowmeters,
Variable Area & In-Line



RATE-MASTER® POLYCARBONATE FLOWMETERS

Gas Flow from 0.05 to 1800 SCFH, Water Flow to 10 GPM

CALIBRATION SERVICES AVAILABLE

RANGE CHART - RMA 2" SCALE - POPULAR RANGES

Range No.	SCFH Air	Range No.	LPM Air
1**	.05 to .4	26	.5 to 5
2	.1 to 1	21	1 to 10
3	.2 to 2	22	2 to 25
4	.5 to 5	23	5 to 50
5	1 to 10	24	5 to 70
6	2 to 20	25	10 to 100
7	5 to 50	Range No.	CC/Min. Water
8	10 to 100	32	5 to 50
9	15 to 150	33	10 to 110
10	20 to 200	34	20 to 300
Range No.	CC/Min. Air	Range No.	GPH Water
151*	5 to 50	42	1 to 11
150*	10 to 100	43	2 to 24
11	30 to 200	44	4 to 34
12	50 to 500	45	5 to 50
13	100 to 1000		
14	200 to 2500		

*Accuracy ±8%, NIST not available.

**NIST not available.

RANGE CHART - RMB 5" SCALE - POPULAR RANGES

Range No.	SCFH Air	Range No.	SCFH and LPM Air
49***	0.5 to 5	50D	1.2 to 10/0.6 to 5
50	1 to 10	51D	2 to 20/1 to 9.5
51	3 to 20	52D	4 to 50/2 to 23
52	4 to 50	53D	10 to 100/5 to 50
53	10 to 100	54D	20 to 200/10 to 95
54	20 to 200	Range No.	GPH and LPM Water
55	40 to 400	82D	1 to 12/0.06 to 0.76
56	50 to 500	83D	1 to 20/0.065 to 1.25
57	60 to 600	85D	10 to 100/0.8 to 6.2
Range No.	GPH Water		
82	1 to 12		
83	1 to 20		
84	4 to 40		
85	10 to 100		

***Accuracy ±5%.

RANGE CHART - RMC 10" SCALE - POPULAR RANGES

Range No.	SCFH Air	Range No.	GPH Water
101	5 to 50	134	2 to 20
102	10 to 100	135	8 to 90
103	20 to 200	Range No.	GPM Water
104	40 to 400	141	.1 to 1
105	60 to 600	142	.2 to 2.2
106	100 to 1000	143	.4 to 4
107	120 to 1200	144	.8 to 7
108	200 to 1800	145	1.2 to 10
Range No.	SCFM Air		
121	1 to 10		
122	2 to 20		
123	4 to 30		

MODEL CHART

Model	Description
RMA-X	Standard RMA
RMA-X-SSV†	RMA with stainless steel valve
RMA-X-TMV**†	RMA with top mounted valve
RMB-X	Standard RMB
RMB-X-SSV†	RMB with stainless steel valve
RMC-X	Standard RMC
RMC-X-SSV†	RMC with stainless steel valve

How To Order: Series-Range No.("X")-Valve-Option

Example: RMA-2-SSV

(Series RMA with .1-1 SCFH air range and stainless steel valve)

*Provide same precision construction but for vacuum applications.

†Valve is designed for flow adjustment only, not intended to be used as an open/shut-off valve.

OPTIONS

To order add suffix:	Description
-APF	Adjustable pointer flag for Series RMA
-BPF	Adjustable pointer flag for Series RMB
-CPF	Adjustable pointer flag for Series RMC
-NIST	NIST traceable calibration certificate

Note: Special ranges, scales, mounting arrangements, etc., are available on special order, or in OEM quantities.



Adjustable pointer flags

Red lined pointer flags provide quick visual reference to a required flow level. Of clear plastic, they snap into place inside bezel and slide to desired level.

ACCESSORIES

Model	Description
RK-RMB	Regulator kit for Series RMB
RKA	Regulator kit for Series RMA



Regulator kits

Available as optional extras for both Rate-Master® flowmeters and Visi-Float® flowmeters models. This view shows Model VFA Visi-Float® flowmeter with integrally connected constant differential pressure regulator. Recommended for use where inlet air pressure fluctuates widely and constant flow is required. The regulator maintains a constant pressure differential of approximately 3 ±.15 psig. Supply pressure must be at least 3 psig above the flowmeter discharge to operate. The standard regulator may be used with any Dwyer® Series RM or VF flowmeter up to 200 SCFH. For higher flow rates consult the factory.

USA: California Proposition 65
WARNING: This product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.